


THE PROFLO® ELECTRIC RANGE NOW COMES WITH A **10 YEAR TANK WARRANTY**

NOW WITH

10

YEAR TANK WARRANTY

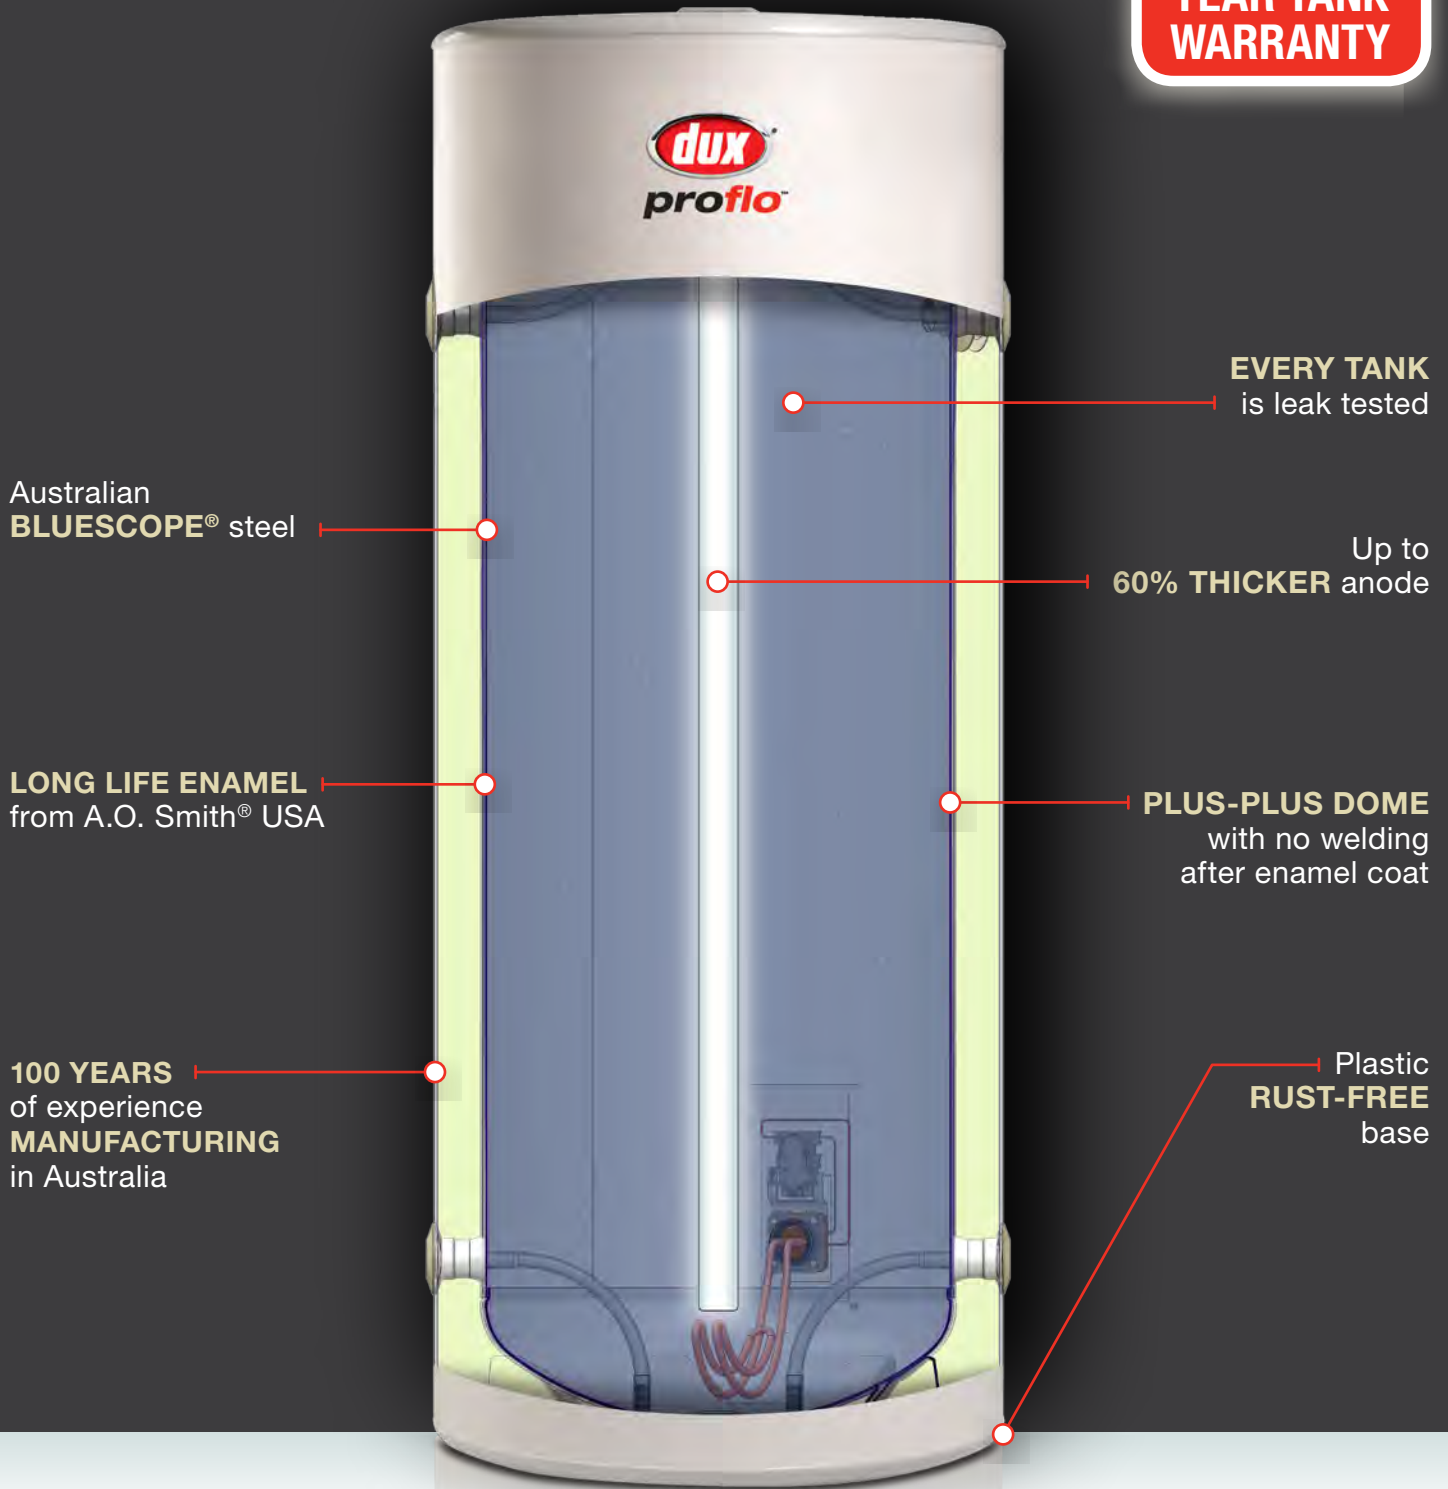

Australian **BLUESCOPE®** steel

LONG LIFE ENAMEL from A.O. Smith® USA

100 YEARS of experience **MANUFACTURING** in Australia

EVERY TANK is leak tested

Up to **60% THICKER** anode

PLUS-PLUS DOME with no welding after enamel coat

Plastic **RUST-FREE** base

Dux has extended its tank warranty from 7 to 10 years on the Proflo 80 – 400L Australian made electric model range



100 YEARS MANUFACTURING IN AUSTRALIA

VISIT WWW.DUX.COM.AU FOR MORE INFORMATION

Warranty terms and conditions are in the product's Owners Manual. Visit www.dux.com.au/warranty-terms for full details and conditions which apply.

proflo[®] *for homes of all sizes*

NOW WITH

10

YEAR TANK WARRANTY

TOUGH HOT WATER SYSTEMS THAT ARE BUILT TO LAST

If you're looking to replace an existing electric storage water heater, the new Dux Proflo[®] range is now an even better choice.


Available in a variety of tank sizes ranging from 80 – 400Ls, Proflo electric storage water heaters combine commercial grade Y class enamel with a thicker anode to deliver an even longer lasting water heater. All backed by a 10 year tank warranty and a company with over 100 years of manufacturing experience in Australia.

- Easy installation, with water connections on both sides of tank
- Low maintenance and long service life
- Full flow pressure to all outlets
- Can be installed indoors or out
- Hard-wearing, tough polymer base resists damage and moisture
- Available in single element and twin element (315L and 400L only)
- Steel tanks feature long life enamel from A. O. Smith and a thicker anode to maximise tank durability
- 10-year tank warranty, including 1-year full parts and labour*
- 25L and 50L Proflo electric models also available (with 7 year tank warranty)



SPECIFICATIONS	80T1	125T1	160T1	250T1	315T1	315T2 TWIN ELEMENT	400T1	400T2 TWIN ELEMENT
Storage Capacity (L)	88	130	161	259	321	321	415	415
Hot Water Delivery Rating (L)	80	125	160	250	315	315	400	400
Twin Element Boost Capacity (L)	-	-	-	-	-	60	-	85
Element Sizes (kW)	1.8, 2.4, 3.6	1.8, 3.6	2.4, 3.6	3.6	3.6	2 x 3.6 or 2 x 4.8	3.6	2 x 3.6
Net Weight Empty (kg)	41	51	59	72	93	93	115	115
Relief Valve Pressure (kPa)	1400	1400	1400	1000	1000	1000	1000	1000
Max Inlet Pressure (kPa)	1120	1120	1120	800	800	800	800	800

TANK DIMENSIONS (MM)	80L	125L	160L	250L	315L	400L
A Overall Height	925	1090	1315	1445	1765	1705
B Overall Diameter	490	530	530	620	620	705
C Cold Water Inlet	160	190	190	195	195	220
D Hot Water Outlet	735	865	1095	1210	1530	1445
E Electrical Entry	85	100	100	105	105	130

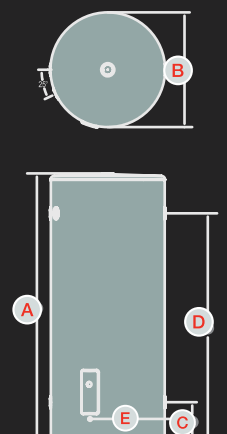

All Dux Proflo water heaters are dual-handed for ease of installation and operate at 240V AC single phase electricity supply. *Warranty terms and conditions are in the product's Owners Manual. Visit www.dux.com.au/warranty-terms for full details